

STUDY OF AN EFFECTIVE NON-TRACKING CONCENTRATED SOLAR POWER SYSTEM AS A VIABLE SOLAR THERMAL BIOMASS CONVERSION PROCESS

M. SHAHRIR M. ZAHARI*, SHAHRUL ISMAIL, AND THIRU MANGAI SRINIVASAN

Faculty of Technology, Ocean Engineering and Informatic, Universiti Malaysia Terengganu, 21030 Kuala Nerus, Terengganu, Malaysia.

* Corresponding author: "shahrir@umt.edu.my

<http://doi.org/10.46754/umtjur.2021.04.015>

Abstract: Sunlight is a natural energy source and abundantly available but restricted to certain timeframe and angles depending on the Earth surface where it could be effectively harvest for energy source. Therefore, the purpose of the study is to evaluate the performance of fixed setting systems in comparison to a custom made non-tracking solar concentrator especially in their potential to reach suitable internal temperature ranges required for pyrolysis purpose within a sealed quartz glass reactor as the heat receiver. For the solar collector, six segmented mirrors were placed at varied angles to enable continuous sun ray directed toward one focal spot, at any time of the day without the need for electrical tracking or manually adjusting it based on the sun angle. The parameters in designing the system setup include: Focal Length, Tilt Angle of lens and Azimuth Angles. It is observed that by fixing the focal length to 35 cm and adjusting the tilt angle of the lens to be fixed at 30°, the reactor was able to achieve the desired temperature range of between 700 to 730. It can be concluded that the combination of Fresnel lens and simple mirror system were capable of concentrating sunlight into a specific area to reach the desired heating range without the need for complicated, costly equipments.

Keywords: Biomass, fresnel lens, solar concentrator, pyrolysis, thermal process

Introduction

The world energy supply is constantly evolving, heading toward procuring reliable renewable energy sources and clean energy sources such as nuclear power and natural sources to replace the conventional and quite environmentally destructive fossil fuels. It is expected that by the year 2040, more than 20% of total energy supply is projected to be coming from renewable sources (Peinado *et al.*, 2019). Among those sources, solar energy is one of the most utilized source of energy and has played an essential role in the overall global transition. After all, the whole planet received about 1000 W / m² of solar irradiation in a day (Abdullah *et al.*, 2019) and there is sufficient solar energy in every 1 hour to meet global energy needs for the whole year, making it a particularly attractive solution for reducing energy consumption in buildings and reducing greenhouse gas emissions. (Alamoudi *et al.*, 2019). In 2013 alone, installed global

solar power had risen the highest by 35%, while installed wind power increased by 12% and geothermal and hydro power by less than 5% (Kannan *et al.*, 2016).

Asian countries such as Malaysia have the highest solar absorption potential being strategically located near the equator. According to Mekhilef *et al.*, (2012), Malaysia's monthly solar irradiation is measured at between 400-600 MJ/m². During the North-East monsoon, the irradiation becomes higher due to the global wind movement from Central Asia to South China Sea across Malaysia and finally blows from November to March to Australia. Meanwhile, lower irradiation is expected during the South-West Monsoon when the wind direction shifts and travels from Australia to Sumatra Island until entering the Malacca Straits between May and September. This ensures that the environment in Malaysia is ideal for solar energy usage throughout the year.

Globally, concentrated solar power is widely used in countries such as Egypt, Spain, India, Iran and Italy which utilize mirrors to focus the sunlight; meant for heating-up water into steam and subsequently generate electricity via the steam engine mechanism. Other than for electricity generation, these concentrators are also used in a variety of other applications such as producing heat/steam for reactions within chemical reactors, heating-up gasifiers, or simply to provide the heat required for melting or increasing product temperature (Zeaiter *et al.*, 2015).

In order to generate high enough temperature for those purposes, Sun-based radiation is focused through reflection or refraction using either mirrors or focal points. The mirrors can be arranged in array plane shape called heliostats whilst the focal points can be straightforward focal points or Fresnel focal points (FL). Concentrators are utilized to improve the orientation of sun ray for different applications (Madhugiri *et al.*, 2012) and the commonly used concentrators are the parabolic trough, Fresnel

lens and solar tower. Concentrators such as the parabolic dish type are generally bulkier and the temperature rise is slow. In comparison, the Fresnel lens offers high optical efficiency along with minimal weight and low cost (Leutz *et al.*, 2000).

Fresnel lenses consist of a series of concentric grooves etched into holder materials. The lens is useful in many different applications due to its ability of gathering light, lightweight construction, availability in small as well as large sizes, and because they are thinner compared to conventional lenses (Xie *et al.*, 2011). Fresnel lenses are often used in light gathering applications as well as for other components within condenser systems or detector setups, solar pyrolysis and preliminary drying of waste samples. Among multiple real life applications of Fresnel lenses that have been effectively demonstrated were for beaming sunlight into rooms, steam generation, solar cooking, solar heating and desalination (Ullah *et al.*, 2014). Figure 1 below shows the ray diagram of a non-imaging Fresnel lens.

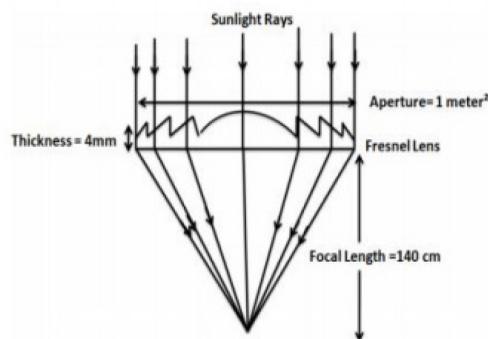


Figure 1: Ray diagram of a non-imaging Fresnel lens
(Source: Gupta *et al.*, 2019)

However, having the lens staying in line with sunlight angle during the day is always necessary to get optimum sunlight radiance over a specific area. To this end, different types of single-axis or dual-axis tracking systems have been developed, based on both mechanical and programmable systems. Evidently, the single-axis mechanical moving system could only be tests for the azimuth angle only, while the dual-

axis tracking device is capable to tracks the sun's movement in the east-west direction and tilts the solar concentrator to utilize the full energy of solar ray during the day (Vu *et al.*, 2016).

Apart from the mechanical and programmable options, a manual way to make use of the solar throughout the day is by installing a non-tracking system using mirrors. Moreover, the non-tracking concentrator is a

very affordable setup that any individual or organization can afford and build as part of an energy conversion system. However, the challenges of the system is on the positioning of its individual parts to make full use of the solar ray and achieve the desired temperature / energy. The current design of concentrator are mostly focused on a fixed sun focal point instead of the positioning and this resulted in a ranges of temperature (between 200 to 500°C) achieved. Therefore, the designed system can only be used for specific applications that require only low temperature gradients and definitely not capable of being used for thermal conversion of biomass.

The ability to modify the system in order to achieve different temperatures can be an added advantage in designing the concentrator system.

In order to maximize their efficiency, various designs of the solar concentrator were studied and the variation depended on both the geometric shape as well as the place of the pot. There has been a lot of progress in the last four decades involving the nature of the solar concentrator. Some of distinguished designs which have significant contribution to solar technology are as shown in Table 1 below (Madhugiri *et al.*, 2012).

Table 1: Advantages and disadvantages of solar concentrators

Type of Solar Concentrator	Advantage	Disadvantage
Parabolic Concentrator	High Concentration	Larger field of view is required. Good tracking system is needed.
Hyperboloid Concentrator	Compact	In order to work effectively, a lens is needed at the entrance aperture
Fresnel Concentrator Lens	Able to separate the direct and diffuse light – suitable for controlling of illumination and temperature of a building interior	Imperfection on the edges of the facets, causing the rays improperly focused at the receiver.
Compound Parabolic Concentrator	Higher gain when its field of view is narrow	Needs a good tracking system

Materials and Methods

Theoretically, high internal reactor temperature as high as 550°C can be reached with an increase in solar irradiation but this temperature would only be able to reach the primary stage of biomass pyrolysis. This is because at about 250 °C, the primary pyrolysis stage starts to occur where the biomass solid experiences significant weight loss and it will end at approximately 500°C, producing the primary products such as water, tar, gases and char. Only at a much higher temperature that all those primary products

can further be converted in various secondary reactions into forming the final product which is the bio-oil. It will take a temperature between 500 and 600 °C for the biomass higher molecular weight components to begin slightly breaking into lighter aromatics and oxygenate but only if they were given time to react. Eventually, the formation of CO, light olefins, and aromatics (from carbohydrates) appears at approximately 700 °C and at much higher temperatures, the third stage leads to tertiary product (polynuclear aromatics) formation. Figure 2 shows the pathways of pyrolysis products from biomass.

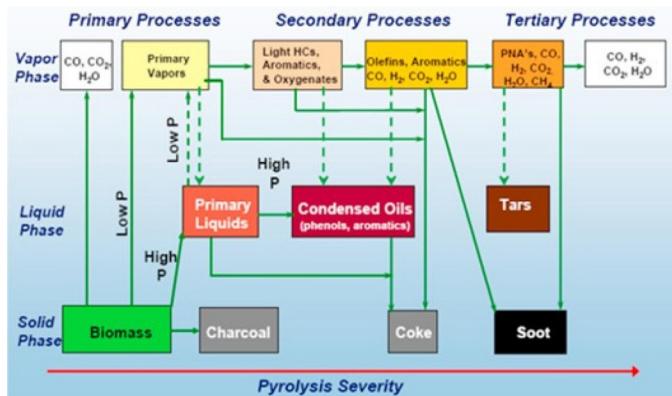


Figure 2: Carbonaceous feedstock pyrolysis pathways

As such, gaining the desired temperature and maintaining the heating process is required. It is logically that the temperature will reach its highest at noon (Gupta *et al.*, 2019). However, the earth rotation and surface location determine the time, place and angle of the sun ray would fall on.

Therefore, in designing the solar concentrator, these parameters that affect the efficiency of the system to concentrate the sunlight at one specific spot will be studied which include focal length, the solar Altitude angle and the Azimuth angle of the Sun as well as on the time variation during the day, the solar irradiance and internal temperature at the receiver end. By definition, the focal length

is the distance from the focal point to where collimated input ray combines to a point usually being indicated in term of f-number (or $f/\#$). The solar azimuth angle as well as the solar altitude angle are the other two very important angles in which these two exhibits upon physical parameters for placement on Earth surface with respect to the position of the Sun, and therefore are not influence by the orientation or inclination of the Earth surface. The solar Azimuth angle (A) is the angular displacement from south of beam projection on the Earth horizontal plane. While, the solar Altitude angle (h) is the angle between the horizontal and the line to the sun, in which the angle would be in between $0^\circ - 90^\circ$. The visual description of these angles is as shown in Figure 3.

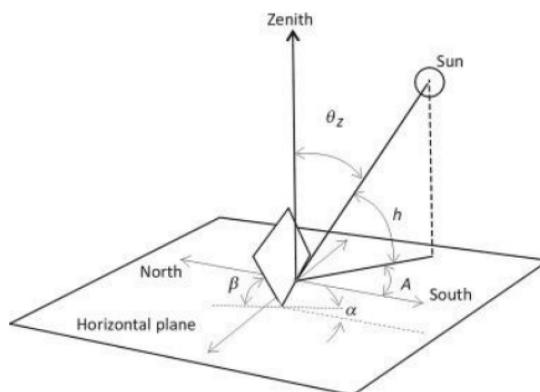


Figure 3: Solar position on sky: Solar azimuth (A), altitude (h) and zenith (θ_z) angles. Surface slope (β) and orientation (α)

Setup A: Development of Fresnel lens Solar Concentrator

The design of solar concentrator consists of three main parts: the Fresnel lens, the lens holder, and the receiver. The material of the lens is acrylic resin (Poly Methyl-Methacrylate, PMMA) which has a long lifetime under the sunlight, a good transparency in the solar spectrum and a low cost of mass production. Moreover, the refractive index of PMMA is 1.49 which is close to that of glass (Mansour *et al.*, 2005). The aim was to have a lens with a radius of curvature and a concentration ratio as high as possible, in order to minimize the focal length and thus minimize the size of the solar rig.

In order to provide an elevation above the ground for the lens, the lens holder will be designed and constructed to fit the specific Fresnel lens. The elevation is measured from the receiver to the surface of the lens. The design of the lens holder is chosen to act like a scissor lift, in order to offer the option to adjust the height of the lens from the ground according to the required temperature. In order for the lens to fit in properly, the dimension of the lens holder will have to be a slightly longer. In that configuration, the maximum power of concentration or heating was achieved by adjusting the lens holder to gain a desired distance between the lens and the receiver which would be equal to the focal length. Therefore, the length of the arms of the lens holder was chosen to be designed in a way that it is higher than the focal length for appropriate manual adjustment. It would also enable modification to obtain a beam of a wider surface area; which would be beneficial to spread the heat more evenly on the surface of the receiver, just merely by shortening the elevation of the lens.

The receiver is the part of the apparatus that will be designed to absorb the radiant energy out of the lens and conduct the heat energy until a satisfying temperature is reached. The receiver is in cylindrical shape and it is made of Quartz glass with a measurement of 30 cm long and a diameter of 5 cm. It is made out of quartz glass that has a high melting point and low thermal

expansion coefficient. Since the material is also practically immune to sudden temperature changes, it would be able to retain the heat much better than other objects. For internal temperature measurement purposes within the glass tube, Empty Fruit Bunch (EFB) as the biomass sample will be placed in the receiver. One end of the receiver will be connected to a thermocouple connected to an Arduino setup in order to measure the temperature of the sample in the receiver. Meanwhile, the other end of the tube is connected to a vacuum pump to suck out air from the receiver vessel to prevent any pressure build-up with the receiver vessel. The dryness and properties of the EFB Sample is measured to test the performance of the system for biomass thermal conversion process.

Setup B: Development of the non-tracking system for the Fresnel Lens Solar Concentrator

A combination of Fresnel lens and six segmented mirrors that are arranged symmetrically to each other is used to develop a non-tracking solar concentrator system. The symmetrical arrangement helps to redirect the sunlight rays into a small area of spot size 50 cm² in order to be used for common solar thermal. Concentrated sunlight is then reflected through segmented mirrors and focused on the receiver which then gets heated.

Segmented mirror system is arranged in different orientations for the design. These mirrors are made up of 0.8 mm thick aluminum sheets that have mirror polishing on the front side of it and this sheet is then pasted on a 1.5mm thick Galvanized Iron (GI) sheet. Unlike any silica mirror, this mirror is supposedly able to sustain high temperature without any bending or breaking. The size of each mirror sheet is 20 cm wide and 70 cm long. The mirrors are placed at various angles, and light is redirected into a specific position on the receiving vessel. A mechanical platform is custom-made for mounting all the mirrors in one setting, with the angle adjusted for each mirror as it is attached onto the main frame. Six segmented mirrors are placed at varied angles that would enable the

system to continually focus the sun ray to one spot, at any time of the day without the need for tracking or adjusting it based on the sun angles. This arrangement would enable continuous solar heating during the whole day while the lens remains stagnant.

The addition of mirrors to the system would enable adjustment for the different sun angle during the day and allow it to focus the sunlight by controlling the mirror tilt angle. Tilt angle is defined as the line that is perpendicular to the axis as the normal line and the angle between the normal line and the incidence light. The large tilt

angle will lead to a large refraction and cause the light to diffuse. Positively, increasing the tilt angle will cause the focal area to deviate from the initial position causing the focal length to become shorter (Zheng, 2017)

Results and Discussion

In order to obtain high temperature in the receiver a few parameters were modified. The effect of the solar irradiance and the time variation of the day were observed to attain high temperature. The data obtained for the parameters for Setup A is as shown in Table 2.

Table 2: Data obtained from field experiment for Setup A

Time	Focal Length (cm)	Tilt Angle (°)	Solar Irradiance (w/m ²)	Temp. (°C)
11:00:09 AM	32	45	874	350
11:03:09 AM	32	45	878	353
11:06:09 AM	32	45	879	347.5
11:09:09 AM	32	45	878	352
11:12:09 AM	32	45	877	350.5
11:15:09 AM	32	45	881	362
11:18:09 AM	32	45	884	364.25
11:21:09 AM	32	45	885	369
11:24:09 AM	32	45	883	304.5
11:27:09 AM	30	45	887	246.75
11:30:09 AM	30	40	890	449.5
11:33:09 AM	30	40	890	401.75
11:36:09 AM	30	40	895	338
11:39:09 AM	30	40	894	214.75
11:42:09 AM	30	40	895	221.25
11:45:09 AM	30	40	897	403.75
11:48:09 AM	30	40	894	443
11:51:09 AM	30	40	896	436.5
11:54:09 AM	30	40	898	484
11:57:09 AM	30	40	899	439
12:00:09 PM	30	40	897	499
12:03:09 PM	30	40	896	450.25
12:06:09 PM	30	40	891	430.75
12:09:09 PM	28	40	892	430.75
12:12:09 PM	28	40	887	421.75

12:15:09 PM	28	35	889	374
12:18:09 PM	28	35	890	308.25
12:21:09 PM	28	35	902	244.25
12:24:09 PM	28	35	899	195.5
12:27:09 PM	28	35	897	190
12:30:09 PM	28	35	893	183.5
12:33:09 PM	28	35	899	166.5
12:36:09 PM	28	35	903	178
12:39:09 PM	28	35	905	197.5
12:42:09 PM	28	30	899	229.25
12:45:09 PM	30	30	900	342
12:48:09 PM	30	30	899	345
12:51:09 PM	30	30	895	418.5
12:54:09 PM	30	30	899	439.5
12:57:09 PM	30	30	903	459.5
13:00:09 PM	30	30	903	454.25
13:03:09 PM	30	30	897	393
13:06:09 PM	30	30	894	388.5
13:09:09 PM	30	30	902	437
13:12:09 PM	29	30	899	399
13:15:09 PM	29	25	896	197.75
13:18:09 PM	29	25	899	392.5
13:21:09 PM	29	25	904	365.5
13:24:09 PM	29	25	902	175.5
13:27:09 PM	29	25	903	135.5
13:30:09 PM	29	25	899	112.75
13:33:09 PM	29	25	899	137.5
13:36:09 PM	29	25	858	106.25
13:39:09 PM	29	25	899	174
13:42:09 PM	29	25	895	268
13:45:09 PM	29	25	905	262
13:48:09 PM	29	25	899	158.75
13:51:09 PM	29	25	903	155.25
13:54:09 PM	29	25	899	152.75
13:57:09 PM	29	25	899	151.25
14:00:09 PM	30	35	904	228
14:03:09 PM	30	35	896	247.25
14:06:09 PM	30	35	900	268.5
14:09:09 PM	30	35	902	282.5

14:12:09 PM	30	35	898	333.25
14:15:09 PM	30	35	901	399
14:18:09 PM	30	35	905	451.75
14:21:09 PM	30	35	901	478.75
14:24:09 PM	30	35	903	429.25
14:27:09 PM	30	30	899	398
14:30:09 PM	30	30	907	457.75
14:33:09 PM	30	30	881	318.5
14:36:09 PM	28	30	894	271.25
14:39:09 PM	28	30	872	214
14:42:09 PM	28	30	908	256.75
14:45:09 PM	28	30	899	384.75
14:48:09 PM	30	35	906	420.25
14:51:09 PM	30	35	897	412.5
14:54:09 PM	30	35	912	485.25
14:57:09 PM	30	35	903	321.5
15:00:09 PM	30	35	899	355.5

From the data in Table 2, the focal length and the tilt angle could be modified accordingly in order to attain high temperature inside the receiver. However, the highest temperature that was able to be reached by Setup A was only 485.25 °C at a solar irradiance of 912 w/m².

The Solar irradiance for Setup A was measured using a Seaward Solar Survey 200R solar irradiance meter. The meter was placed on the setup to measure the solar irradiance during time experiment which is from 11:00 am to 3:00 pm. The data obtained for the solar irradiance on the day of experiment is as shown in Figure 4.

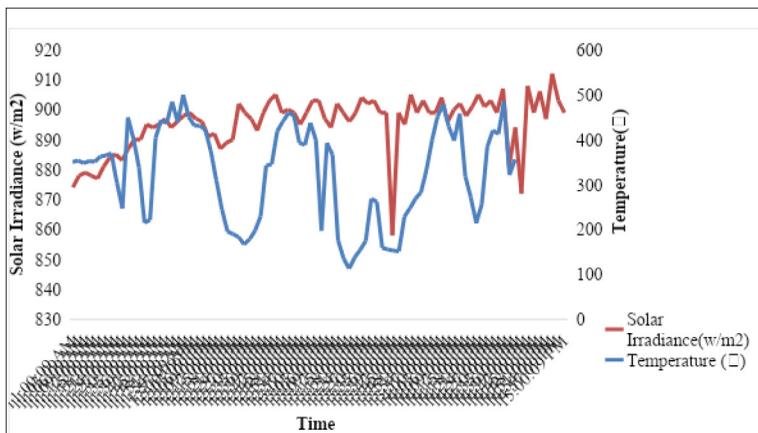


Figure 4: Effect of Solar irradiance and time variation on the internal temperature of the receiver for setup A

Variation of solar intensity and internal temperature fluctuations with respect to time variation is shown in Figure 2. The highest temperature was reached at a Solar irradiance measurement of 912 w/m^2 at around 12:05:00 noon. This shows that the solar irradiance of the sun was the highest at noon and the Fresnel lens is able to capture the light ray and convert it into the form of heat.

Regarding the effect of the solar irradiance, it is important to mention that the lowest peaks observed are mainly due to the clouds, which block the direct solar radiation, and the wind speed variation. The little fluctuations are essentially due to errors associated with the thermocouples considering that the variation of

temperature at each time is low (Barbosa *et al.*, 2016). From the results, it can be concluded that a difference in solar irradiance of approximately 46 W/m^2 leads to a significant loss of heat resulting in the temperature to decrease to 106.25°C .

As for the effect of the time variation on the internal temperature can be interpreted by the movement of the sun. At noon, the sun is at the top directly above the Fresnel lens setup.

As for the Design for Setup B with a non-tracking system installed, based on previous study by Cheng *et al.*, 2016 the effect of the solar irradiance on the internal temperature is as shown in Figure 5.

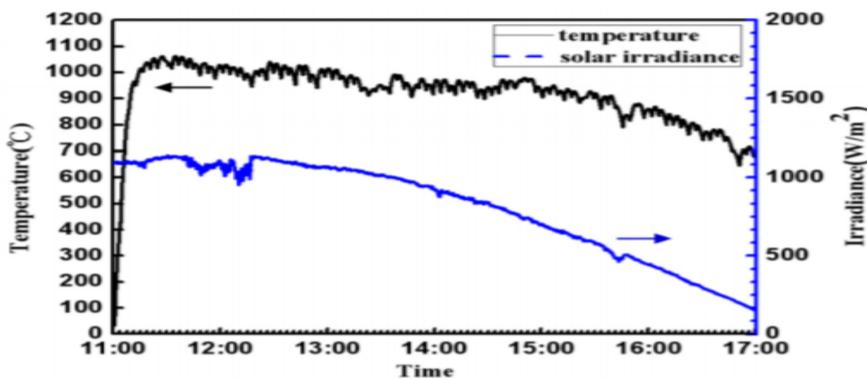


Figure 5: Effect of Solar irradiance and time variation on the internal temperature of the receiver for setup B (Cheng *et al.*, 2016)

Based on a study by Cheng *et al.*, (2016), the slight temperature fluctuation in the temperature profile as seen in Figure 3 is due to the changing period from the mounted tracking device. However, about 16:00–17:00 in the afternoon, when the decrease in solar irradiance is only about 80 percent relative to midday, the decrease in the temperature curve is only about 35 percent due to the slight loss of heat and both decrease the temperature of the heating head. So even, when the solar irradiance is low, the temperature remains at a relatively higher temperature of around 650°C .

It is observed experimental setting and the previous study, it has shown that the optimum

tilt angles for the both setups (Setup A and Setup B) are 35° . The increase in the tilt angle up to 45° will cause the focal area to deviate from the initial position causing the focal length to become shorter causing the temperature to drop drastically. This is because the large tilt angle will lead to a large refraction and cause the light to diffuse causing the temperature to drop (Zheng, 2017). However for the setup B with a non-tracking system higher temperature of about 670°C can be attained meanwhile for setup A the highest temperature was only around 400°C . This is because the ray of light is transmitted at one single point throughout the day instead of having heat being lost to the surrounding.

Comparing the experimental results for Setup A and the literature result for Setup B, it is observed that the collector with a non-tracking system installed is able to reach higher temperature internally when compared with the other concentrator that does not have any tracking system. In fact, the maximum temperature recorded in the receiver was only 485°C for Setup A. Meanwhile, the design of the segmented mirror system installed in setup B played a significant role to raise the temperature inside the receiver throughout the day. This confirms that a setup with a tracking system installed leads to a significant increase in system efficiency.

Conclusion

For Fresnel Lens solar concentrator, it is observed that by fixing the focal length to 35 cm and the tilt angle of the lens to be fixed to 30° the maximum temperature that is obtained in the reactor can reach up to almost 500°C. The Azimuth angle of the Sun on the noon of the experiment day was 103° which contributed to the highest temperature reached. The maximum temperature that can be attained by a setup (Setup A) without any tracing system is only up to almost 500°C but improvement as suggest by previous study using a setup with a non-tracking system consisting of mirrors could enable it to attain higher temperature. In conclusion, the combination of Fresnel lens and mirror system is a unique tool for day-round concentration of sunlight in a specific location. This engineered device is useful over a day and for a whole year for many solar thermal and electrical applications without monitoring the sunlight using high cost trackers.

Acknowledgements

We are thankful to the support by the lecturers and students in Electronic & Instrumentation Field at Faculty of Ocean Engineering, Technology and Informatics (FTKKI) in their technical assistance for this project. Our thanks and appreciations also go to our internship students from TU Delft

for their time and support in completing this project.

References

- Abdullah, W. S. W., Osman, M., Kadir, M. Z. A. A., & Verayiah, R. (2019). The potential and status of renewable energy development in Malaysia. *Energies*, *12*(12).
- Alamoudi, A., Saaduddin, S. M., Munir, A. B., Muhammad-Sukki, F., Abu-Bakar, S. H., Yasin, S. H. M., Sellami, N. (2019). Using static concentrator technology to achieve global energy goals. *Sustainability* (Switzerland), *11*(11), 1–22.
- Barbosa1, J. L. (2016). *Development of a solar concentrator with tracking system*. Copernicus Publications.
- Cheng, C. K. (2016). Biaxial-Type Concentrated Solar Tracking System with a Fresnel Lens for Solar-Thermal Applications.
- Gupta, M., Dubey, A. K., Kumar, V., & Mehta, D. S. (2019). Solar concentrator based multipurpose sunlight harvesting system without tracking. *OSA Continuum*, *2*(3), 667.
- Kannan, N., & Vakeesan, D. (2016). Solar energy for future world: - A review. *Renewable and Sustainable Energy Reviews*, *62*, 1092–110
- Leutz, R., Suzuki, A., Akisawa, A., Kashiwagi, T., & Toksoy, J. (2000). Developments and designs of solar engineering Fresnel lenses. *Proceedings Symposium on Energy Engineering*, *2*, 759–765.
- Madhugiri, G. A., & Karale, S. R. (2012). High solar energy concentration with a Fresnel lens: A Review. *International Journal of Modern Engineering Research (IJMER)*
- Mansour, A. F. (2005). Optical Properties of Fullerene/PMMA. *International Journal of Polymeric Materials*, pp. 227–235.
- Mekhilef, S., Safari, A., Mustafa, W.E.S., Saidur, R., Omar, R., Younis, M. A. A. (2012) Solar energy in Malaysia: Current state and prospects. *Renewable and Sustainable Energy Review*, *16*, 386–396.

- Peinado Gonzalo, A., Pliego Marugán, A., & García Márquez, F. P. (2019). A review of the application performances of concentrated solar power systems. *Applied Energy*, 255, (March), 113893.
- Ullah, I., & Shin, S., (2014). Highly concentrated optical fiber-based daylighting systems for multi-floor office buildings. 72, 246-261.
- Vu, N. H., & Shin, S. (2016). Optical fiber daylighting system combined with LED lighting and CPV based on stepped thickness waveguide for indoor lighting. *Journal of the Optical Society of Korea*, 20(4), 488-499.
- Xie, W. T., Dai, Y. J., Wang, R. Z., & Sumathy, K. (2011). Concentrated solar energy applications using Fresnel lenses: A review. *Renewable and Sustainable Energy Reviews*, 15(6), 2588-2606.
- Zeaiter, J., Ahmad, M. N., Rooney, D., Samneh, B., & Shamma, E. (2015). Design of an automated solar concentrator for the pyrolysis of scrap rubber. *Energy Conversion and Management*, 101, 118-125.
- Zheng, H. (2017). *Solar Energy Desalination Technology*. Amsterdam: John Feder.

